



Denodo OData 4.0 Service User Manual

Revision 20240303

NOTE

This document is confidential and proprietary of **Denodo Technologies**. No part of this document may be reproduced in any form by any means without prior written authorization of **Denodo Technologies**.

Copyright © 2024
Denodo Technologies Proprietary and Confidential

CONTENTS

1 OVERVIEW.....	4
2 INSTALLATION.....	5
2.1 DEPLOYING INTO THE DENODO EMBEDDED WEB CONTAINER.....	7
2.2 CONFIGURING JNDI RESOURCES IN APACHE TOMCAT.....	9
3 ENABLING CROSS-ORIGIN RESOURCE SHARING (CORS).....	12
4 VIRTUAL DATAPORT PRIVILEGE REQUIREMENTS.....	14
5 FEATURES.....	14
6 SERVING METADATA.....	15
7 QUERYING DATA: THE BASICS.....	16
7.1 QUERYING COLLECTIONS.....	16
7.2 OBTAINING ITEMS BY PRIMARY KEY.....	17
7.3 ACCESSING INDIVIDUAL PROPERTIES.....	17
7.4 ACCESSING INDIVIDUAL PROPERTY VALUES.....	18
7.5 ACCESSING COMPLEX PROPERTIES.....	18
7.6 COUNTING ELEMENTS IN A COLLECTION: \$COUNT.....	18
7.7 ESTABLISHING THE RESPONSE FORMAT.....	19
8 NAVIGATING ASSOCIATIONS.....	22
8.1 PUBLISHING VDP ASSOCIATIONS THROUGH ODATA.....	22
8.2 QUERYING RELATED ENTRIES.....	23
8.3 REFERENCING RELATED ENTITIES.....	24
9 ADVANCED QUERYING.....	25
9.1 SELECTION: \$FILTER.....	25
9.2 PROJECTION: \$SELECT.....	28
9.3 ORDERING RESULTS: \$ORDERBY.....	29
9.4 INCLUDING RELATED RESOURCES: \$EXPAND.....	30
9.5 PARAMETER ALIASES.....	33
9.6 SPECIFYING MAXIMUM NUMBER OF RESULTS: \$TOP.....	33
9.7 SPECIFYING OFFSET: \$SKIP.....	33
9.8 ASKING FOR TOTAL RESULT COUNT: \$COUNT.....	34
10 PAGINATION.....	35
11 DEBUG OPTION.....	36

12 ENTITY COLLECTION STREAMING.....37

13 CONFIGURING BROWSERS FOR KERBEROS.....37

13.1 FIREFOX.....37

13.2 INTERNET EXPLORER.....38

13.3 CHROME.....41

14 LIMITATIONS.....41

14.2 LIMITATIONS IN VERSIONS PRIOR TO DENODO PLATFORM 6.0.....43

1 OVERVIEW

[OData](#) (**Open Data Protocol**) is a REST-based protocol for querying and updating data using simple HTTP messages. It is an OASIS standard based on technologies such as HTTP, Atom/XML and JSON.

Denodo OData Service allows users to connect to the Denodo Platform and query its databases using an [OData 4.0](#) interface.

Previous version of the Denodo OData Service was interoperable with OData 2.0. From OData 2.0 several features were added, improved or pruned. Denodo OData Service 4 addresses these changes.

Note that this document will use <VERSION> as a placeholder for the specific version of the Denodo Platform you are installing the Denodo OData Service for. So this placeholder should be replaced by the Denodo version number of your installation.

2 INSTALLATION

The Denodo OData Service distribution consists of:

- A war file: denodo-odata4-service-<VERSION>.war
- A documentation folder containing this user manual
- A scripts folder containing the scripts to install the service into the Denodo embedded web container

For running the Denodo OData Service you need to deploy the war file in **Apache Tomcat 7+** (using Java 7 or later). You need to include the Virtual DataPort (VDP) driver in the folder /lib of Apache Tomcat 7+.

VDP driver (denodo-vdp-jdbcdriver.jar) is in the folder:

- `$DENODO_HOME\lib\vdp-jdbcdriver-core` in Denodo Platform 5.5.
- `$DENODO_HOME\tools\client-drivers\jdbc` in Denodo Platform 6.0 and later.

The web application container must provide the data source configuration in order to connect to the Virtual DataPort server using JNDI. The JNDI name of the resource must be `jdbc/VDPdatabase`. See the **Configuring JNDI resources in Apache Tomcat section** for more information.

The Denodo OData Service has the following configuration properties:

- `odataserver.address`: service name. It is an optional property, `/denodo-odata.svc` by default.
- `odataserver.serviceRoot`: root URI of the service. It is an optional property, empty by default. It should be configured when the OData service is going to be accessed through a **gateway**, so links within the OData response use this URI as root.

For example, being:

```
odataserver.serviceRoot=https://gw.denodo.com:9000/ODATA/
```

and accessing:

```
http://server001:9090/denodo-odata4-service-<VERSION>/denodo-odata.svc/movies
```

will return this kind of URI within the response:

```
https://gw.denodo.com:9000/ODATA/denodo-odata.svc/movies
```

- `server.pageSize`: number of returned entries per request (see **Pagination section** for more information)
- `enable.adminUser`: false if access to the OData service is denied to the admin user. Note that this functionality can be used only with Basic authentication, not with Kerberos authentication.
- `disable.kerberosAuthentication`: true if the access to the OData service is not allowed using Kerberos authentication. Note that if this property is set to true, Basic authentication or OAuth 2.0 authentication (only available for Denodo Platform 7.0) has to be available.

- `disable.basicAuthentication`: true if the access to the OData service is not allowed using HTTP Basic authentication. Note that if this property is set to true, OAuth 2.0 authentication (only available for Denodo Platform 7.0) or Kerberos authentication has to be available.
- `disable.oauth2Authentication`: true if the access to the OData service is not allowed using OAuth 2.0 authentication. Note that this property is only available for Denodo Platform 7.0 and later and if it is set to true, Basic authentication or Kerberos authentication has to be available.
- `debug.enabled`: true for support purposes. With this property enabled the service response contains additional helpful data. It is false by default.
- `enable.streaming`: true for support entity collection streaming. It is true by default.

The war file includes a configuration file

`WEB-INF/classes/configuration.properties` that has default values for the properties explained above:

```
odataserver.address=/denodo-odata.svc
odataserver.serviceRoot=
server.pageSize=1000
enable.adminUser=true
disable.kerberosAuthentication=false
disable.basicAuthentication=false
disable.oauth2Authentication=false
debug.enabled=false
enable.streaming=true
```

Besides, these properties can be provided by the web container via JNDI (see the **Configuring JNDI resources in Apache Tomcat** section for more information).

Properties configured at the web container as JNDI entries have higher precedence than those established at the `configuration.properties` file.

Once you deploy the war you can use the Denodo OData Service from a web client, using **HTTP Basic Authentication** with VDP-valid credentials. URLs are of the form:

`http://localhost:8080/denodo-odata.svc/<DBNAME>`

Note that for the sake of simplicity in this document, we will consider the Denodo OData Service to be installed at the ROOT context of the web server.

Kerberos Authentication is also supported when Kerberos authentication is enabled in the Virtual DataPort server (see the **Configuring browsers for Kerberos** section for more information).

2.1 DEPLOYING INTO THE DENODO EMBEDDED WEB CONTAINER

For deploying the service in the internal web container of the Denodo Platform you have two options, with option A you can execute manually the scripts. And with the option B, you can run the start and the stop of the application as a Service in Windows NT/2000/2003/XP/Vista.

2.1.1 Option A

You should follow these steps:

1. Copy the `denodo-odata4-service-<VERSION>.war` into `<DENODO_HOME>/resources/apache-tomcat/webapps/`
2. Create a context xml file for the service. You can use the xml file in the Denodo OData Service distribution as a template: `/scripts/denodo-odata4-service-<VERSION>.xml`.
3. Copy the `denodo-odata4-service-<VERSION>.xml` file into `<DENODO_HOME>/resources/apache-tomcat/conf/DenodoPlatform-<VERSION>/localhost`
4. Check in `<DENODO_HOME>/resources/apache-tomcat/conf/catalina.properties` file that the `common.loader` property (shared.loader in Denodo 5.5) includes a reference to the VDP JDBC Driver. If missing, add it:
 - `${catalina.base}/../../tools/client-drivers/jdbc/denodo-vdp-jdbcdriver-basic.jar` for Denodo Platform 6.0 and later
 - `${catalina.base}/../../lib/vdp-jdbcdriver-core/denodo-vdp-jdbcdriver-basic.jar` for Denodo Platform 5.5
5. Create launch scripts for the service. You can use as a template the files located at the `scripts` folder in the Denodo OData Service distribution:
 - `odata4_service_startup.bat (.sh)`
 - `odata4_service_shutdown.bat (.sh)`

Make sure to modify the `DENODO_HOME` variable in the script files to point to your Denodo installation.

6. Copy the launch scripts into <DENODO_HOME>/bin.
7. Configure via JNDI the VDP data source and those properties you want to change their default value (see the **Configuring JNDI resources in Apache Tomcat** for more information).
8. Run the <DENODO_HOME>/bin/odata4_service_startup.bat(.sh) script and navigate to:

**`http://localhost:9090/denodo-odata4-service-
<VERSION>/denodo-odata.svc/<DBNAME>`**

2.1.2 Option B

This option is only for Windows systems.

- 1-4. Same as option A
5. Create service script for the Denodo Odata Service (odata4_service_service). You can use the attached template. Make sure to modify the DENODO_HOME variable in the script templates to point to your Denodo installation.
6. Create the file service.conf and copy in the folder <DENODO_HOME>/conf/denodo-odata4-service-service/, you can use the attached template. Make sure to modify the DENODO_HOME variable in the script templates to point to your Denodo installation.
7. Install as a Windows service. Execute odata4-service-service.bat install
8. You can manage the installed service from the application of Windows: Services.

After launching of the service you can navigate to:

**`http://localhost:9090/denodo-odata4-service-
<VERSION>/denodo-odata.svc/<DBNAME>`**

2.2 CONFIGURING JNDI RESOURCES IN APACHE TOMCAT

2.2.1 Data source configuration

2.2.1.1 For Denodo Platform 6.0 and later

1. Declare the data source with the name jdbc/VDPdatabase in Apache Tomcat's server.xml file.
If you deploy the Denodo OData Service into the Denodo embedded web container you must declare the JNDI resource in:

- <DENODO_HOME>/resources/apache-tomcat/conf/server.xml file

Below, there is an example:

```
<GlobalNamingResources>
  <Resource name="jdbc/VDPdatabase"
    auth="Container"
    type="javax.sql.DataSource"
    username="admin" password="admin"
    url="jdbc:vdb://localhost:9999/admin"
    driverClassName="com.denodo.vdp.jdbc.Driver"
    initialSize="5"

    <!-- maxWaitMillis and maxWait for          -->
    <!-- compatibility between Tomcat versions -->
    maxWaitMillis="5000"
    maxWait="5000"

    <!-- maxTotal and maxActive for compatibility -->
    <!-- between Tomcat versions                -->
    maxTotal="20"
    maxActive="20"
    maxIdle="5"
    validationQuery="select 1"
    poolPreparedStatements="true"/>
</GlobalNamingResources>
```

2. Reference the JNDI resource in the Apache Tomcat's context.xml file.
If you deploy the Denodo OData service into the Denodo embedded web container the context.xml file is in the
<DENODO_HOME>/resources/apache-tomcat/conf folder.

```
<Context>
  <ResourceLink name="jdbc/VDPdatabase"
    global="jdbc/VDPdatabase"
    type="javax.sql.DataSource"/>
</Context>
```

2.2.1.2 For Denodo Platform 5.5:

1. Declare the data source with the name jdbc/VDPdatabase in Apache Tomcat's context.xml file.
If you deploy the Denodo OData Service into the Denodo embedded web container you must declare the JNDI resource in:

- `<DENODO_HOME>/resources/apache-tomcat/conf/context.xml` file

```
<Context>
  <Resource name="jdbc/VDPdatabase"
    auth="Container"
    type="javax.sql.DataSource"
    username="admin" password="admin"
    url="jdbc:vdb://localhost:9999/admin"
    driverClassName="com.denodo.vdp.jdbc.Driver"
    initialSize="5"
    <!-- maxWaitMillis and maxWait for          -->
    <!-- compatibility between Tomcat versions -->
    maxWaitMillis="5000"
    maxWait="5000"
    <!-- maxTotal and maxActive for compatibility -->
    <!-- between Tomcat versions                -->
    maxTotal="20"
    maxActive="20"
    maxIdle="5"
    minIdle="0"
    validationQuery="select 1"
    poolPreparedStatements="true"/>
</Context>
```

* The settings described for Denodo Platform 6.0 can work with 5.5 but in the initialization of Tomcat embedded would appear a spurious error that you could ignore.

* The parameter `minIdle` could be greater than 0. In this way the performance of the connections would be better, but other applications could maintain open connections that never will be used.

2.2.2 Properties configuration

Declare the properties values in the `context.xml` file:

```
<Context>
  <!-- OPTIONAL PARAMETER -->
  <Environment type="java.lang.String"
```

```
        name="odataserver.address"
        value="/denodo-odata.svc"/>

<!-- OPTIONAL PARAMETER -->
<Environment type="java.lang.String"
  name="odataserver.serviceRoot"
  value="https://gw.denodo.com:9000/ODATA/" />
<Environment type="java.lang.Integer"
  name="server.pageSize"
  value="1000" />
<Environment type="java.lang.Boolean"
  name="enable.adminUser"
  value="false" />
<Environment type="java.lang.Boolean"
  name="disable.kerberosAuthentication"
  value="true" />
<Environment type="java.lang.Boolean"
  name="disable.basicAuthentication"
  value="false" />
<Environment type="java.lang.Boolean"
  name="disable.oauth2Authentication"
  value="false" />
<Environment type="java.lang.Boolean"
  name="debug.enabled"
  value="false" />
<Environment type="java.lang.Boolean"
  name="enable.streaming"
  value="true" />
</Context>
```

If you deploy the service in the internal web container of the Denodo Platform, this file is at <DENODO_HOME>/resources/apache-tomcat/conf.

3 ENABLING CROSS-ORIGIN RESOURCE SHARING (CORS)

Cross-origin resource sharing (CORS) is a mechanism whereby a browser and server interact to determine whether to allow a web page to perform HTTP requests to a domain other than the domain from which the web page is originated. I.e. so the

browser can determine if it is safe that a page served from the domain `http://foo.com` can send requests to a server in the domain `http://bar.com`.

Once deployed the Denodo OData Service, follow these steps to enable the CORS support:

1. Edit the `web.xml` file which is at the `WEB-INF` folder. If you have deployed the Denodo OData Service into the Denodo embedded web container the path to the directory is `<DENODO_HOME>/resources/apache-tomcat/webapps/denodo-odata4-service-<VERSION>/WEB-INF/`.
2. Add the External Entity adding the elements `DOCTYPE` and `ENTITY` above the root element `web-app`:

```
<!DOCTYPE doc [  
<!ENTITY cors_settings SYSTEM "cors_settings.xml">  
>  
<web-app ...>
```

And add the reference in the filters section:

```
<!-- ***** -->  
<!-- Filters -->  
<!-- ***** -->  
&cors_settings;
```

3. Edit the file `cors_settings.xml` which is at the `WEB-INF` folder. If you have deployed the Denodo OData Service into the Denodo embedded web container the path to the directory is `<DENODO_HOME>/resources/apache-tomcat/webapps/denodo-odata4-service-<VERSION>/WEB-INF/`.
4. Uncomment the contents of the file.
5. If the value of the property is `*`, the Service will allow CORS requests received from any domain.

To limit the domains from which CORS requests are allowed, change the value of the property `cors.allowOrigin`. Replace `*` with the list of allowed URLs. Separate each URL by a comma. For example: `https://foo.com, http://foo.com, https://foo.bar.com`.

CORS requests from any other origin will be denied with the HTTP code 403 (Forbidden)

Important: for each URL, enter its protocol as well. URLs that do not contain the protocol are invalid. E.g. **foo.com** is invalid.

6. Restart the Denodo OData Service to apply the changes.

Note that if you have deployed the Denodo OData Service in an external web container you need to configure the container to allow external entities to be loaded or, manually replace in `web.xml` file at WEB-INF folder `&cors_settings` reference with the content of the file `cors_settings.xml` which is at WEB-INF folder and remove the elements DOCTYPE and ENTITY above the root element `web-app`.

4 VIRTUAL DATAPORT PRIVILEGE REQUIREMENTS

Users of OData Service should have the following VDP privileges assigned:

- At database level
 - **Connect**
- At view level
 - **Metadata** (for Denodo Platform 6.0 and later)
 - **Read**: If you do not have Read access to an entire database, but you have it over some of its elements, the OData Service will only list the elements that you have Read privilege over.

5 FEATURES

OData 4.0 defines three levels of conformance for OData services. OData Denodo Service conforms to the **Intermediate Conformance Level** providing the following functionality:

- **Read-only** access to Denodo databases:
 - Metadata
 - Entities
 - Items of an entity
 - Properties of an item
 - Property values
 - Relationships between entities
- Format results in Atom and JSON
- Query options
 - \$select
 - \$filter
 - \$expand
 - \$orderby
 - \$skip
 - \$top
 - \$count
- Parameter aliases
- Pagination
- HTTP Authentication
 - Basic
 - Kerberos

- OAuth 2.0 (only available for Denodo Platform 7.0)

6 SERVING METADATA

There are two types of metadata documents:

- The **Service Document** lists all the entities offered by the data service. It is available at the root URI of the service, specifying the database name where we are going to get information: `/denodo-odata.svc/<DBNAME>`.

Below, there is an example where the accessible collections of movies database are actor, address, city, country, film and film_actor.

`http://localhost:8080/denodo-odata.svc/movies`

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata",
  "value": [
    {
      "name": "actor",
      "url": "actor"
    },
    {
      "name": "address",
      "url": "address"
    },
    {
      "name": "city",
      "url": "city"
    },
    {
      "name": "country",
      "url": "country"
    },
    {
      "name": "film",
      "url": "film"
    },
    {
      "name": "film_actor",
      "url": "film_actor"
    }
  ]
}
```

- The **Service Metadata Document**, also called **Entity Data Model (EDM)**, is an XML representation of the data model exposed by the service. It is available at `.../$metadata`:

`http://localhost:8080/denodo-odata.svc/movies/$metadata`

Example of an entity country that has a relationship with zero or more city elements:

```
<EntityType Name="country">
  <Key>
    <PropertyRef Name="country_id"/>
  </Key>
  <Property Name="country_id" Type="Edm.Int16"
    Nullable="false"/>
  <Property Name="country" Type="Edm.String"
    MaxLength="50"/>
  <Property Name="last_update" Type="Edm.DateTimeOffset"
    Precision="19"/>
  <NavigationProperty Name="cities"
    Type="Collection(com.denodo.odata4.city)"
    Partner="country">
    <ReferentialConstraint Property="country_id"
      ReferencedProperty="country_id"/>
  </NavigationProperty>
</EntityType>
```

The Denodo OData Service maps these OData structures to VDP concepts like this:

Denodo OData Service	VDP
Entity Type	View Definition
<i>Entity Type > Property</i>	<i>View Column</i>
<i>Entity Type > Navigation Property</i>	<i>Association Role</i>
Relationship	Association Definition
Entity Set	View Data
Imported Functions	-

7 QUERYING DATA: THE BASICS

7.1 QUERYING COLLECTIONS

In the Service Metadata Document (see the **Serving Metadata** section for more information) you can see the entity set names and to see their data you must use the following URL:

`/denodo-odata.svc/<DBNAME>/collectionName`

Note that you cannot access entities with white spaces in the name, according to the OData 4 specification.

Example:

`/denodo-odata.svc/movies/actor`

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    },
    ...
    {
      "actor_id": 1000,
      "first_name": "CHRISTIAN",
      "last_name": "GABLE",
      "last_update": "2006-02-15T11:34:33Z"
    }
  ],
  "@odata.nextLink": "/denodo-odata.svc/movies/actor?$skiptoken=1000"
```

Note that, for the sake of simplicity, we are removing the server and port from the examples.

7.2 **OBTAINING ITEMS BY PRIMARY KEY**

Each item could be identified using its primary key property:

```
denodo-odata.svc/<DBNAME>/collectionName(keyvalue)
```

Examples:

```
/denodo-odata.svc/movies/actor(1)
/denodo-odata.svc/movies/store_category('F0')
```

The primary key can be a compound key, and in that case you must include all values separated by commas:

```
/denodo-odata.svc/<DBNAME>/collectionName(key1, key2)
```

Example:

```
/denodo-odata.svc/movies/film_actor(actor_id=1, film_id=1)
```

7.3 **ACCESSING INDIVIDUAL PROPERTIES**

Properties of an item can be accessed individually:

```
/denodo-odata.svc/<DBNAME>/collectionName(key)/propertyName
```

Example:

```
/denodo-odata.svc/movies/actor(1)/first_name
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor/first_name",
  "value": "PENELOPE"
}
```


7.4 ACCESSING INDIVIDUAL PROPERTY VALUES

The value of a property is available as a raw value:

```
/denodo-odata.svc/<DBNAME>/collectionName(key)/propertyName/  
$value
```

Example:

```
/denodo-odata.svc/movies/actor(1)/first_name/$value
```

Response:

```
PENELOPE
```

7.5 ACCESSING COMPLEX PROPERTIES

Properties can be complex but they are also accessible. You must point out the property path, from the complex to the simple one:

```
/denodo-  
odata.svc/<DBNAME>/collectionName(key)/propName/complexProp/propName
```

For example, for the following `film_data` complex field in a `struct_table_film` entity:

```
{  
  "@odata.context": "/denodo-odata.svc/movies/$metadata  
                    #struct_table_film/$entity",  
  "table_id": 1,  
  "film_data": {  
    "id": 1,  
    "title": "ACADEMY DINOSAUR",  
    "description": "ELIZABETH"  
  }  
}
```

we could perform the following call:

```
/denodo-odata.svc/movies/struct_table_film(1)/film_data/title
```

Response:

```
{  
  "@odata.context": "/denodo-odata.svc/movies/$metadata  
                    #struct_table_film/title",  
  "value": "ACADEMY DINOSAUR"  
}
```

7.6 COUNTING ELEMENTS IN A COLLECTION: \$COUNT

If you want to know the number of elements in a collection you have to add `$count` to the URL:

```
/denodo-odata.svc/<DBNAME>/collectionName/$count
```

Example:

```
/denodo-odata.svc/movies/actor/$count
```

Response:

```
200
```

7.7 ESTABLISHING THE RESPONSE FORMAT

OData resources can be represented in Atom or JSON, being JSON the default format.

Clients can request the format through the system query option `$format` or through the Accept header. In the case that both the Accept header and the `$format` query option are specified on a request, the `$format` query option has a higher precedence.

7.7.1 JSON format

This format can be requested using the system query option `$format` that shows data using the JSON format as defined in [OData:JSON](#):

```
/denodo-odata.svc/movies/actor?$format=json
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    },
    ...
    {
      "actor_id": 1000,
      "first_name": "CHRISTIAN",
      "last_name": "GABLE",
      "last_update": "2006-02-15T11:34:33Z"
    }
  ],
  "@odata.nextLink": "/denodo-odata.svc/movies/actor?$skiptoken=1000"
}
```

You can also use the MIME type `application/json` optionally followed by the format parameter `odata.metadata`. This parameter allows users to specify the amount of control information that will be included in the response:

- `odata.metadata=minimal` indicates that the service should remove computable control information from the payload wherever possible. This is the default value.

```
/denodo-odata.svc/movies/actor?
$formats=application/json;odata.metadata=minimal
```

Response:

Actor data, just the same as a request with the abbreviation json and without the parameter odata.metadata=minimal.

- odata.metadata=full indicates that the service must include all control information explicitly in the payload.

```
/denodo-odata.svc/movies/actor?
$formats=application/json;odata.metadata=full
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "value": [
    {
      "@odata.type": "#com.denodo.odata4.actor",
      "@odata.id": "/denodo-odata.svc/admin/actor(1)",
      "@odata.readLink": "/denodo-odata.svc/admin/actor(1)",
      "actor_id@odata.type": "#Int16",
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
      "films@odata.navigationLink": "/denodo-
odata.svc/admin/actor(1)/films",
      "films@odata.associationLink": "/denodo-
odata.svc/admin/actor(1)/films/$ref"
    },
    ...
    {
      "@odata.type": "#com.denodo.odata4.actor",
      "@odata.id": "/denodo-odata.svc/admin/actor(1000)",
      "@odata.readLink": "/denodo-odata.svc/admin/actor(1000)",
      "actor_id@odata.type": "#Int16",
      "actor_id": 1000,
      "first_name": "CHRISTIAN",
      "last_name": "GABLE",
      "last_update": "2006-02-15T11:34:33Z"
      "films@odata.navigationLink": "/denodo-
odata.svc/admin/actor(1000)/films",
      "films@odata.associationLink": "/denodo-
odata.svc/admin/actor(1000)/films/$ref"
    }
  ],
  "@odata.nextLink": "/denodo-odata.svc/movies/actor?$skiptoken=1000"
```

- odata.metadata=none indicates that the service should omit control information other than odata.nextLink and odata.count.

```
/denodo-odata.svc/movies/actor?  
$format=application/json;odata.metadata=none
```

Response:

```
{  
  "value": [  
    {  
      "actor_id": 1,  
      "first_name": "PENELOPE",  
      "last_name": "GUINNESS",  
      "last_update": "2006-02-15T11:34:33Z"  
    },  
    ...  
    {  
      "actor_id": 1000,  
      "first_name": "CHRISTIAN",  
      "last_name": "GABLE",  
      "last_update": "2006-02-15T11:34:33Z"  
    }  
  ],  
  "@odata.nextLink": "/denodo-odata.svc/movies/actor?$skiptoken=1000"
```

Alternatively, this format can be requested using the HTTP header Accept:

- Accept: application/json
- Accept: application/json;odata.metadata=minimal
- Accept: application/json;odata.metadata=full
- Accept: application/json;odata.metadata=none

Note that, if specified, \$format overrides any value specified in the Accept header.

7.7.2 Atom format

This format can be requested using the system query option \$format that shows data using the Atom format defined in [OData:Atom](#):

```
/denodo-odata.svc/movies/actor?$format=atom
```

Response:

```
<?xml version='1.0' encoding='UTF-8'?>  
<a:feed xmlns:a="http://www.w3.org/2005/Atom"  
  xmlns:m="http://docs.oasis-open.org/odata/ns/metadata"  
  xmlns:d="http://docs.oasis-open.org/odata/ns/data" m:context="/denodo-  
odata.svc/movies/$metadata#actor">  
  <a:id>/denodo-odata.svc/movies/actor</a:id>  
  <a:link rel="next" href="/denodo-odata.svc/movies/actor?  
$format=atom&$skiptoken=1000"/>
```

```
<a:entry>
  <a:id>/denodo-odata.svc/movies/actor(1)</a:id>
  <a:title/>
  <a:summary/>
  <a:updated>2016-04-22T13:07:42Z</a:updated>
  <a:author>
    <a:name/>
  </a:author>
  <a:link rel="edit" href="/denodo-odata.svc/movies/actor(1)"/>
  <a:link rel="http://docs.oasis-open.org/odata/ns/related/actors"
type="application/atom+xml;type=feed" title="actors" href="/denodo-
odata.svc/movies/actor(1)/actors"/>
  <a:category scheme="http://docs.oasis-open.org/odata/ns/scheme"
term="#com.denodo.odata4.actor"/>
  <a:content type="application/xml">
    <m:properties>
      <d:actor_id m:type="Int16">1</d:actor_id>
      <d:first_name>PENELOPE</d:first_name>
      <d:last_name>GUINNESS</d:last_name>
      <d:last_update m:type="DateTimeOffset">2006-02-
15T11:34:33Z</d:last_update>
    </m:properties>
  </a:content>
</a:entry>
...
```


Alternatively, this format can be requested using the HTTP header Accept:
Accept: application/atom+xml

Note that, if specified, \$format overrides any value specified in the Accept header.

8 NAVIGATING ASSOCIATIONS

8.1 PUBLISHING VDP ASSOCIATIONS THROUGH ODATA

Denodo Virtual DataPort allows you to define relationships between the elements of two views. The following example shows an association where the elements of the country view can be related with the elements of the city view. Every country is related with zero or more cities.

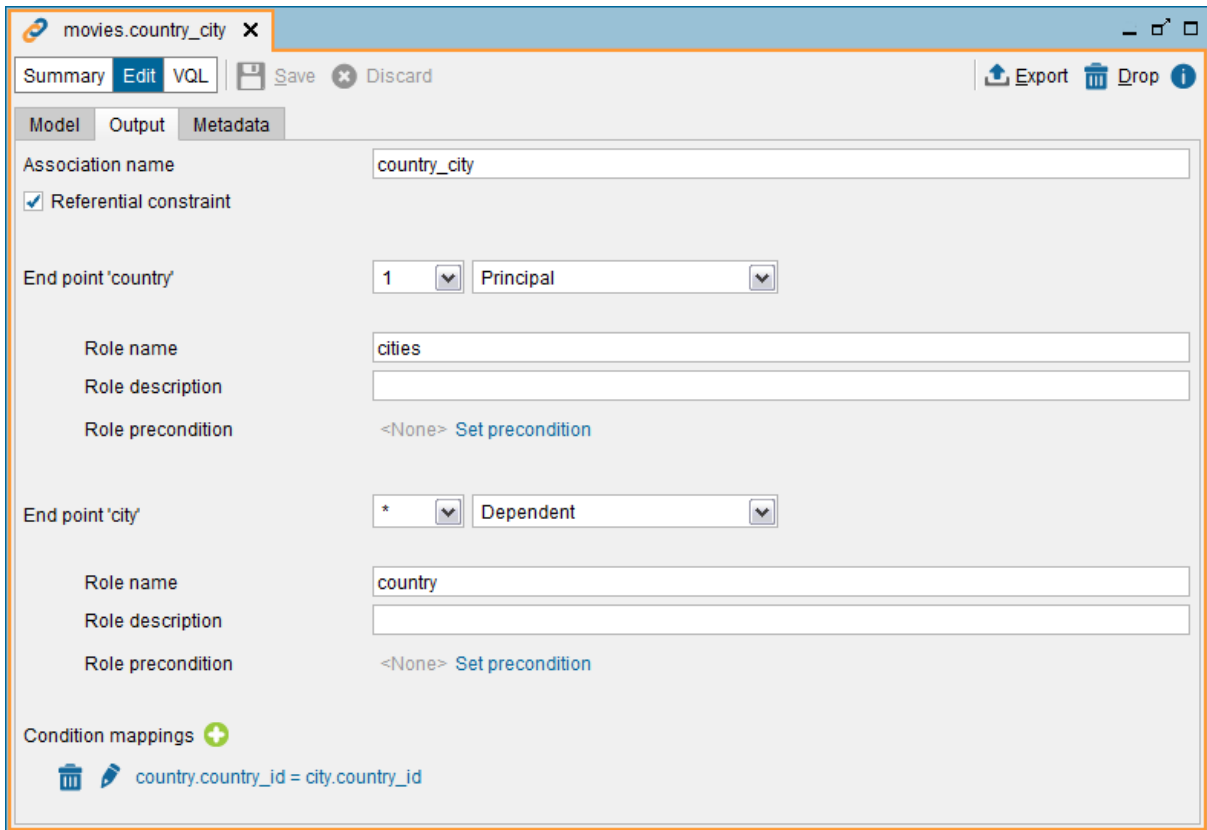

This relationship is represented in the Service Metadata Document as a **navigation property**:

```
<EntityType Name="country">
  <Key>
    <PropertyRef Name="country_id"/>
  </Key>
  <Property Name="country_id" Type="Edm.Int16"
    Nullable="false"/>
  <Property Name="country" Type="Edm.String" MaxLength="50"/>
  <Property Name="last_update" Type="Edm.DateTimeOffset"
    Precision="19"/>
  <NavigationProperty Name="cities"
    Type="Collection(com.denodo.odata4.city)"
    Partner="country">
    <ReferentialConstraint Property="country_id"
      ReferencedProperty="country_id"/>
  </NavigationProperty>
</EntityType>
```

8.2 QUERYING RELATED ENTRIES

Denodo OData Service allows navigating the associations defined in VDP in order to get all the entities related with a particular entity. This is done by means of **navigation properties**.

```
/denodo-
odata.svc/<DBNAME>/collectionName(key)/navigationPropertyName
```

For example, being `cities` a navigation property in the entity type `country` that navigates towards the `city` entity type:

```
/denodo-odata.svc/movies/country(2)/cities
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#city",
  "value": [
    {
      "city_id": 59,
      "city": "Batna",
      "country_id": 2,
      "last_update": "2006-02-15T11:45:25Z"
    },
    {
      "city_id": 63,
      "city": "Bchar",
      "country_id": 2,
      "last_update": "2006-02-15T11:45:25Z"
    },
    {
      "city_id": 483,
      "city": "Skikda",
      "country_id": 2,
      "last_update": "2006-02-15T11:45:25Z"
    }
  ]
}
```

8.3 REFERENCING RELATED ENTITIES

You can get the references to the collection of entities (instead of the actual entities) related with one particular entity.

This is requested appending `$ref` to the URL path. The old syntax `/$links/` has been dropped in OData 4.

```
/denodo-odata.svc/<DBNAME>/collectionName(key)/navProp/$ref
```

The URL specified below will show the references of every `city` associated with the entry `country(2)` through the navigation property `cities`:

```
/denodo-odata.svc/movies/country(2)/cities/$ref
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#cities",
  "value": [
    {
      "@odata.id": "city(59)"
    },
    {
      "@odata.id": "city(63)"
    }
  ]
}
```

```

    },
    {
      "@odata.id": "city(483)"
    }
  ]
}
    
```

9 ADVANCED QUERYING

OData defines some query options that allows refining the requests: \$filter, \$select, \$orderby and \$expand.

9.1 SELECTION: \$FILTER

A URI with a \$filter system query option identifies a subset of the entries from the collection that satisfy the \$filter predicate expression.

Expressions can reference properties and literals. The latter can be strings (enclosed in single quotes), the null literal, numbers or boolean values.

Denodo OData service supports the following operations and functions:

9.1.1 Operators

Operator	Description	Example
eq	Equal	/actor?\$filter=first_name eq 'GRACE'
ne	Not equal	/actor?\$filter=first_name ne 'GRACE'
gt	Greater than	/actor?\$filter=actor_id gt 5
ge	Greater than or equal	/actor?\$filter=actor_id ge 5
lt	Less than	/actor?\$filter=actor_id lt 10
le	Less than or equal	/actor?\$filter=actor_id le 10
and	Logical and	/actor?\$filter=actor_id gt 5 and actor_id lt 10
or	Logical or	/actor?\$filter=actor_id lt 5 or first_name eq 'GRACE'
not	Logical negation	/actor?\$filter=not (actor_id eq 1)

add	Addition	/film?\$filter=length add 30 gt 180
sub	Subtraction	/film?\$filter=length sub 30 gt 120
mul	Multiplication	/film?\$filter=length mul 2 ge 300
div	Division	/film?\$filter=length div 3 eq 60
mod	Modulo	/film?\$filter=length mod 10 eq 8
()	Precedence grouping	/actor?\$filter=actor_id lt 7 and (first_name eq 'NICK' or actor_id gt 3)

9.1.2 String functions

The following functions are available for strings operations:

- `contains(string p0, string p1)` returns true when the value of the property name specified in `p0` contains the string `p1`. Otherwise returns false.
- `startswith(string p0, string p1)` returns true when the value of the property name specified in `p0` starts with the string `p1`. Otherwise returns false.
- `endswith(string p0, string p1)` returns true when the value of the property name specified in `p0` ends with the string `p1`. Otherwise returns false.
- `indexOf(string p0, string p1)` returns the position of the string `p1` in the value of the property name specified in `p0`.
- `length(p0)` returns the length of the value of the property name specified in `p0`.
- `substring(string p0, int pos)` returns a new string that is a substring of the value of the property name specified in `p0`. The substring begins with the character at the specified `pos` and extends to the end of this string.
- `substring(string p0, int pos, int length)` returns a new string that is a substring of the value of the property name specified in `p0`. The substring begins at the specified `pos` and extends to the character at index `pos + length`.
- `toLowerCase(string p0)` returns a copy of the value of the property name specified in `p0` converted to lowercase.
- `toUpperCase(string p0)` returns a copy of the value of the property name specified in `p0` converted to uppercase.
- `trim(string p0)` returns a copy of the value of the property name specified in `p0` with leading and trailing whitespace omitted.

- `concat(string p0, string p1)` returns a new string that is a concatenation of the string `p0` and the string `p1`.

The following table shows a summary and examples of these functions:

Function	Example
<code>bool contains(string p0, string p1)</code>	<code>/actor?\$filter=contains(first_name, 'LO')</code>
<code>bool startswith(string p0, string p1)</code>	<code>/actor?\$filter=startswith(first_name, 'JO')</code>
<code>bool endswith(string p0, string p1)</code>	<code>/actor?\$filter=endswith(first_name, 'ER')</code>
<code>int indexof(string p0, string p1)</code>	<code>/actor?\$filter=indexof(last_name, 'LO') eq 3</code>
<code>int length(string p0)</code>	<code>/actor?\$filter=length(first_name) eq 4</code>
<code>string substring(string p0, int pos)</code>	<code>/actor?\$filter=substring(first_name, 2) eq 'RO'</code>
<code>string substring(string p0, int pos, int length)</code>	<code>/actor?\$filter=substring(first_name, 2,3) eq 'TTH'</code>
<code>string tolower(string p0)</code>	<code>/actor?\$filter=tolower(first_name) eq 'nick'</code>
<code>string toupper(string p0)</code>	<code>/actor?\$filter=toupper(first_name) eq 'NICK'</code>
<code>string trim(string p0)</code>	<code>/actor?\$filter=trim(first_name) eq 'JENNIFER'</code>
<code>string concat(string p0, string p1)</code>	<code>/actor?\$filter=concat(concat(first_name, ','), last_name) eq 'JENNIFER, DAVIS'</code>

9.1.3 Math functions

There are three math functions: `round`, `floor`, `ceiling`. Each one allows `Double` or `Decimal` types as parameters and the returned value is of the same type as the parameter.

Function	Example
<code>round</code>	<code>/film?\$filter=round(replacement_cost) eq 21</code>
<code>floor</code>	<code>/film?\$filter=floor(replacement_cost) eq 20</code>
<code>ceiling</code>	<code>/film?\$filter=ceiling(replacement_cost) eq 21</code>

9.1.4 Date functions

Function	Example
int year(DateTimeOffset p0) int year(Date p0) <i>-since Denodo 7.0</i>	/actor?\$filter=year(last_update) eq 2016
int month(DateTimeOffset p0) int month(Date p0) <i>-since Denodo 7.0</i>	/actor?\$filter=month(last_update) eq 12
int day(DateTimeOffset p0) int day(Date p0) <i>-since Denodo 7.0</i>	/actor?\$filter=day(last_update) eq 31
int hour(DateTimeOffset p0) int hour(TimeOfDay p0) <i>-since Denodo 7.0</i>	/actor?\$filter=hour(last_update) eq 3
int minute(DateTimeOffset p0) int minute(TimeOfDay p0) <i>-since Denodo 7.0</i>	/actor?\$filter=minute(last_update) eq 34
int second(DateTimeOffset p0) int second(TimeOfDay p0) <i>-since Denodo 7.0</i>	/actor?\$filter=second(last_update) eq 33
DateTimeOffset now()	/actor?\$filter=last_update lt now()

9.2 PROJECTION: \$SELECT

The \$select system query option returns only the properties explicitly requested. \$select expression can be a comma-separated lists of properties or the star operator (*), which will retrieve all the properties.

Example:

```
/denodo-odata.svc/movies/actor?
$select=actor_id,first_name,last_name
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor
    (actor_id,first_name,last_name)",
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS"
    },
    ...
  ]
}
```

Another example:

```
/denodo-odata.svc/movies/actor?$select=*
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor(*)",
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    },
    ...
  ]
}
```

Note that complex properties can be used in \$select expressions:

```
denodo-odata.svc/admin/struct_table_film?$select=film_data/title
```

Response:

```
"@odata.context": "/denodo-odata.svc/admin/$metadata
#struct_table_film(film_data/title)",
"value": [
  {
    "@odata.id": "/denodo-odata.svc/admin/struct_table_film(1)",
    "film_data": {
      "title": "ACADEMY DINOSAUR"
    }
  },
  ...
]
```

9.3 ORDERING RESULTS: \$ORDERBY

The \$orderby query string option specifies the order in which items are returned:

```
/denodo-odata.svc/<DBNAME>/collectionName?$orderby=attribute
[asc|desc]
```

To order the collection the resource path must identified a collection of entries, otherwise this option is unavailable.

The keywords asc and desc determine the direction of the sort (ascending or descending, respectively). If asc or desc are not specified items are returned in ascending order. Null values come before non-null values when sorting in ascending order and vice versa.

You can also sort by multiple attributes:

```
/denodo-odata.svc/<DBNAME>/collectionName?
$orderby=attribute1[asc|desc],attribute2 [asc|desc]
```

Example:

```
/denodo-odata.svc/movies/address?$orderby=zip,client_identifier
desc
```

9.4 INCLUDING RELATED RESOURCES: \$EXPAND

\$expand is **available since Denodo Platform 6.0**.

An \$expand expression is a comma-separated list of navigation properties that specifies the related entities that should be represented inline.

Example:

```
/denodo-odata.svc/movies/country?$expand=cities
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#country",
  "value": [
    {
      "country_id": 1,
      "country": "Afghanistan",
      "last_update": "2006-02-15T11:44:00Z",
      "city": [
        {
          "city_id": 251,
          "city": "Kabul",
          "country_id": 1,
          "last_update": "2006-02-15T11:45:25Z"
        }
      ]
    }
  ],
  ...
}
```

The following is an example with two navigation properties. This URI identifies the film set as well as the film_actor (actors is the navigation property) and the film_category (categories is the navigation property) associated with each film:

```
/denodo-odata.svc/movies/film?$expand=actors,categories
```

Response:

```
...
{
  "film_id": 2,
  "title": "ACE GOLDFINGER",
  "description": "An Astounding Epistle of a Database Administrator And an Explorer who must Find a Car in Ancient China",
  "release_year": "2005-12-31T23:00:00Z",
  "language_id": 1,
  "original_language_id": null,
  "rental_duration": 3,
  "rental_rate": 4.99,
  "length": 48,
  "replacement_cost": 12.99,
  "rating": "G",
  "special_features": "Trailers,Deleted Scenes",
  "last_update": "2006-02-15T12:03:42Z",
  "categories": [
    {

```

```

    "film_id": 2,
    "category_id": 11,
    "last_update": "2006-02-15T12:07:09Z"
  }
],
"actors": [
  {
    "actor_id": 19,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z"
  },
  {
    "actor_id": 85,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z"
  },
  {
    "actor_id": 90,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z"
  },
  {
    "actor_id": 160,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z"
  }
]
},
...

```

Expanded entities can be filtered, ordered, paged, projected and expanded. Allowed system query options are \$filter, \$select, \$orderby, \$skip, \$top, \$count and \$expand. These expand options are expressed as a semicolon-separated list enclosed in parentheses:

```

/denodo-odata.svc/movies/film?
$expand=categories($select=last_update)

```

```

/denodo-odata.svc/movies/film?
$expand=categories($orderby=last_update asc)

```

```

/denodo-odata.svc/movies/film?$expand=actors($count=true)

```

Response:

```

...
{
  "film_id": 2,
  "title": "ACE GOLDFINGER",
  "description": "An Astounding Epistle of a Database Administrator
And an Explorer who must Find a Car in Ancient
China",
  "release_year": "2005-12-31T23:00:00Z",
  "language_id": 1,
  "original_language_id": null,
  "rental_duration": 3,
  "rental_rate": 4.99,

```

```
"length": 48,
"replacement_cost": 12.99,
"rating": "G",
"special_features": "Trailers,Deleted Scenes",
"last_update": "2006-02-15T12:03:42Z",
"actors": [
  {
    "actor_id": 19,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z",
    "categories": [
      {
        "film_id": 2,
        "category_id": 11,
        "last_update": "2006-02-15T12:07:09Z"
      }
    ]
  },
  {
    "actor_id": 85,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z",
    "categories": [
      {
        "film_id": 2,
        "category_id": 11,
        "last_update": "2006-02-15T12:07:09Z"
      }
    ]
  },
  {
    "actor_id": 90,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z",
    "categories": [
      {
        "film_id": 2,
        "category_id": 11,
        "last_update": "2006-02-15T12:07:09Z"
      }
    ]
  },
  {
    "actor_id": 160,
    "film_id": 2,
    "last_update": "2006-02-15T12:05:03Z",
    "categories": [
      {
        "film_id": 2,
        "category_id": 11,
        "last_update": "2006-02-15T12:07:09Z"
      }
    ]
  }
],
...
```

9.5 PARAMETER ALIASES

Parameter aliases are identifiers prefixed with an @ sign. They can be used in query expressions to avoid stating the same literal multiple times, or deferring lengthy literals to a place where they are easier to read.

Example:

```
/denodo-odata.svc/movies/film?$filter=contains(title,@p1)    and
not contains(description,@p1)&@p1='ACADEMY DINOSAUR'
```

9.6 SPECIFYING MAXIMUM NUMBER OF RESULTS: \$TOP

With the \$top option you can select the n first entries of the collection, being n a non-negative integer:

```
/denodo-odata.svc/<DBNAME>/collectionName?$top=n
```

Example:

```
/denodo-odata.svc/movies/actor?$top=1
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    }
  ]
}
```

9.7 SPECIFYING OFFSET: \$SKIP

With the option \$skip, the n first entries of the collection will not be shown in the response. n is a non-negative integer.

```
denodo-odata.svc/<DBNAME>/collectionName?$skip=n
```

Example:

```
/denodo-odata.svc/movies/actor?$skip=199
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "value": [
    {
      "actor_id": 200,
      "first_name": "THORA",
      "last_name": "TEMPLE",
      "last_update": "2006-02-15T11:34:33Z"
    }
  ]
}
```



```
}
```

9.8 ASKING FOR TOTAL RESULT COUNT: \$COUNT

The \$count system query option returns the number of items returned in the response along with the result.

The old syntax \$inlinecount=allpages has been shortened in OData 4 to \$count=true.

The \$count system query option ignores \$top, \$skip, and \$expand query options, and returns the total count of results across all pages including only those results matching any specified \$filter .

Examples:

```
/denodo-odata.svc/movies/actor?$count=true
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "@odata.count": 200,
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    },
    ...
  ]
}
```

Another example:

```
/denodo-odata.svc/movies/actor?$count=true&$filter=actor_id eq 1
```

Response:

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "@odata.count": 1,
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    }
  ]
}
```

Another example:

```
/denodo-odata.svc/movies/actor?$count=false
```

Response:

Actor data, just the same as a request without \$count option.

```
{
  "@odata.context": "/denodo-odata.svc/movies/$metadata#actor",
  "value": [
    {
      "actor_id": 1,
      "first_name": "PENELOPE",
      "last_name": "GUINNESS",
      "last_update": "2006-02-15T11:34:33Z"
    },
    ...
  ]
}
```

10 PAGINATION

Whenever the Denodo OData Service has to return a collection of entries which size exceeds that configured at the server `.pageSize` property of its configuration file, it will split the response into pages, returning only the first 1000 entries (the default value for page size).

Denodo OData Service will add to the response a *next link*, which will easily allow the client to request the next page of results.

Next links include a `$skiptoken` parameter. They look like this:

```
/denodo-odata.svc/movies/actor?$skiptoken=1000
```

If the original request includes query options, the result will show the *next link* with these query options and a `$skiptoken` as in the examples below.

Example request:

```
/denodo-odata.svc/movies/actor?$top=2&$skip=1
```

Response:

```
...
"@odata.nextLink": "/denodo-odata.svc/movies/actor?
$top=2&$skip=1&$skiptoken=1000"
...
```

Besides using the configuration property `server.pageSize` users can request another page size using the `odata.maxpagesize` preference in the `Prefer` header.

11 DEBUG OPTION

For debug purposes there is a possibility to enrich the OData service response with additional helpful data.

The additional data consists of information about the request, the response, the parsed request URI, the server environment, library timings, and the stack trace in case an error occurred.

To request the debug output for a request to the OData service the query parameter `odata-debug=json` or `odata-debug=html` must be appended to the original request URL:

`http://localhost:8080/denodo-odata.svc/movies/?odata-debug=json`

12 ENTITY COLLECTION STREAMING

The Entity Collection Streaming option enables support for chunked HTTP responses without the need to have the entire Entity Collection pre-loaded (which probably would be in memory).

To enable this option it is necessary to carry out the following two steps:

1. Set the `enable.streaming` property to `true`. This can be done through the file `configuration.properties` by adding a new entry to the file with the value `enable.streaming=true` or through the web container via JNDI (you can see an example of how to configure it in the **Configuring JNDI resources in Apache Tomcat** section).

Please, note that properties configured at the web container as JNDI entries have higher precedence than those established at the `configuration.properties` file.

By default, the `configuration.properties` configuration file has the value of the property set to `true`.

2. At the OData HTTP request level, add the preference `odata.entitystreaming` to the `Prefer` header. The value of this preference must be set to `true`, i.e., `odata.entitystreaming=true`.

The header should be included in the request as follows:
`Prefer: odata.entitystreaming=true`

For Entity Collection Streaming support enabled, the previous two parameters (`enable.streaming` and `odata.entitystreaming`) are mandatory to be established and its value to be `true`.

13 CONFIGURING BROWSERS FOR KERBEROS

Because the browser is connected to the Denodo OData Service which is communicating with a VDP server, Kerberos authentication and delegation should be enabled for the browser.

13.1 FIREFOX

By default Firefox does not enable SPNEGO authentication, and consequently Kerberos.

13.1.1 Enable Kerberos Authentication

1. Go to **about:config** in the address bar in Firefox

2. Click **I'll be careful, I promise** when warned about changing advanced settings
3. Enter **negotiate** in the **Search** box
4. Set value of the **network.negotiate-auth.trusted-uris** to your domain name

13.1.2 Enable Kerberos Delegation


1. Go to **about:config** in the address bar in Firefox
2. Click **I'll be careful, I promise** when warned about changing advanced settings
3. Enter **negotiate** in the **Search** box
4. Set value of the **network.negotiate-auth.delegation-uris** to your domain name

Restart browser and see if everything works.

13.2 INTERNET EXPLORER



13.2.1 Enable Kerberos Authentication

1. Click **Tools -> Internet Options**
2. **Advanced** tab
3. Enable checkbox for **Enable Integrated Windows Authentication**

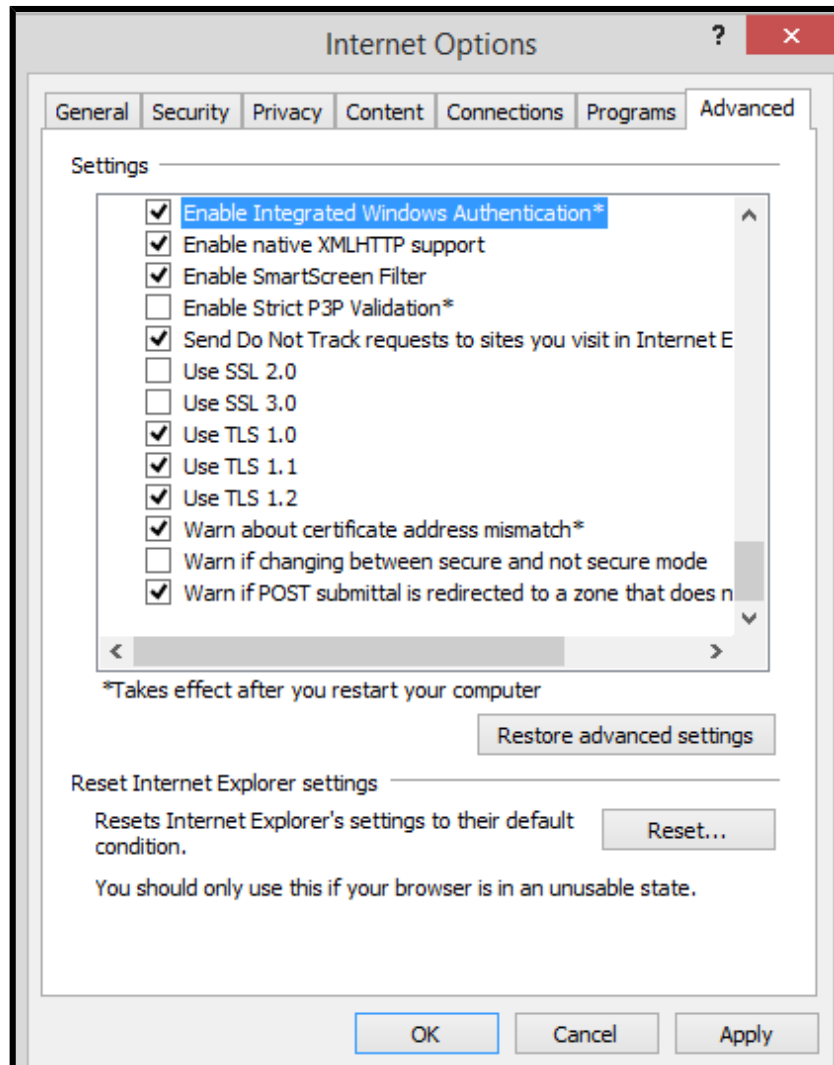


13.2.2 Enable Kerberos Delegation

1. Click **Tools -> Internet Options**
2. **Security** tab -> **Local intranet** -> **Sites**

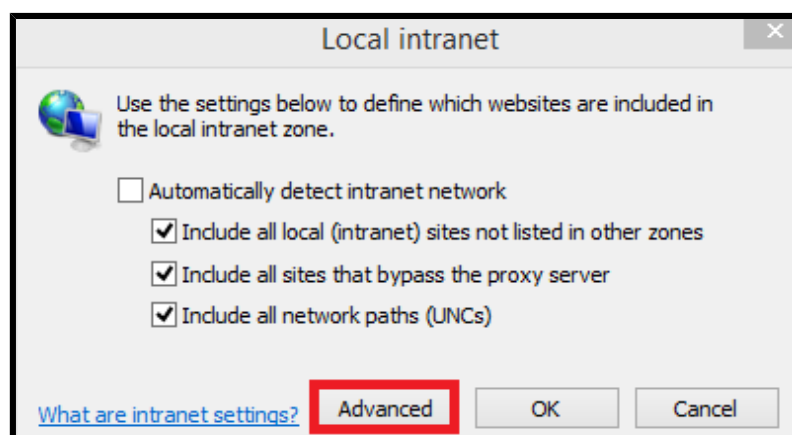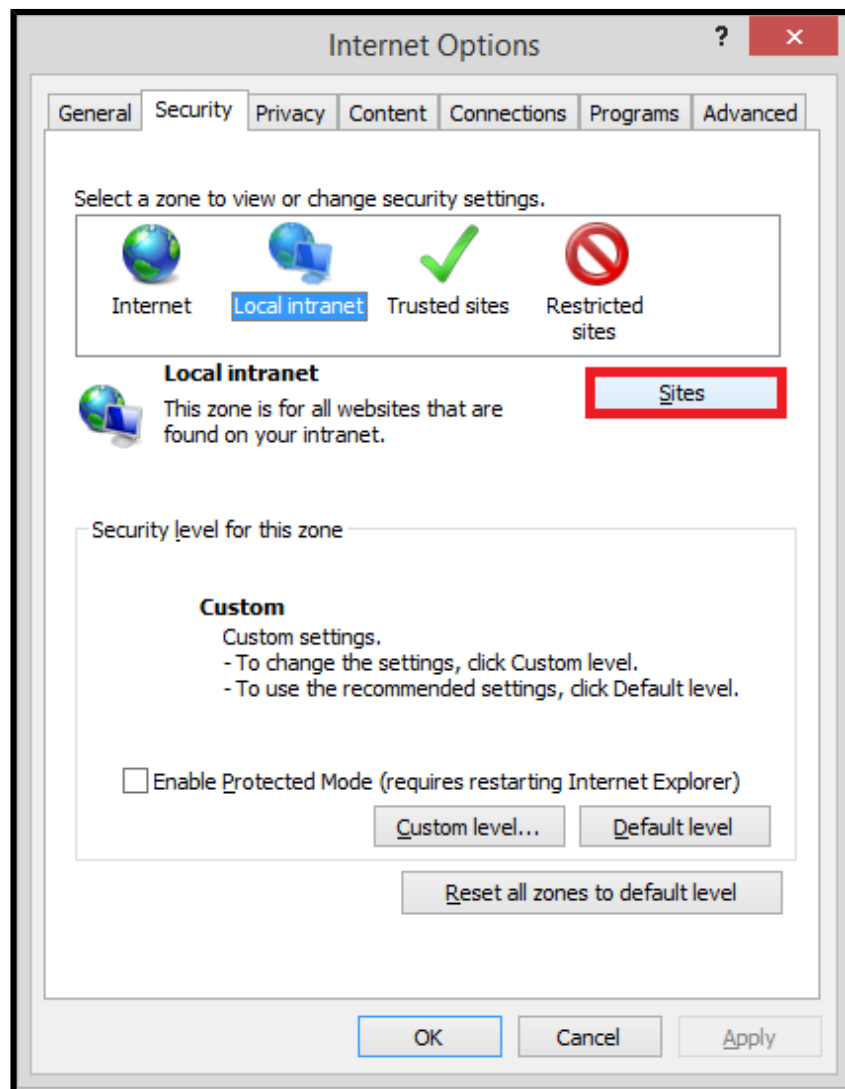

3. Add the site in question.

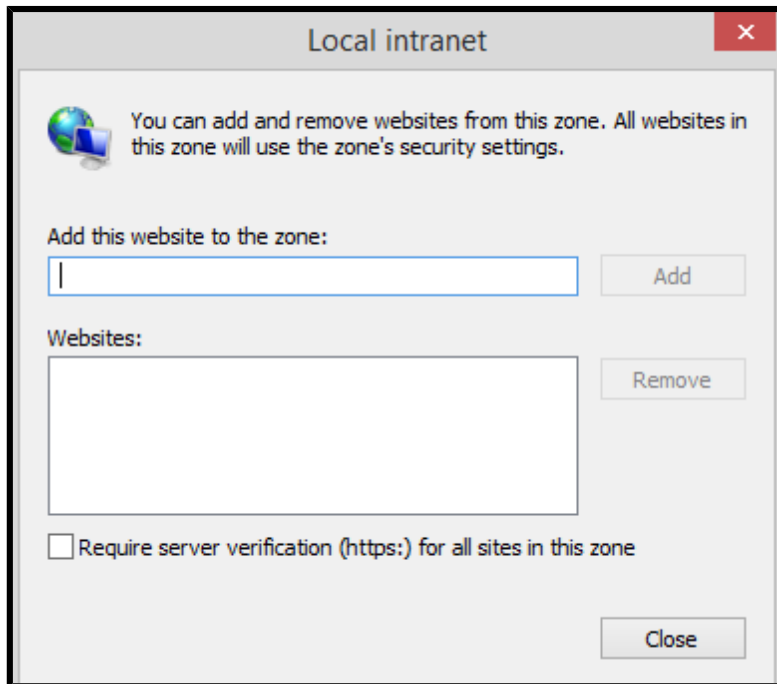

Restart browser and see if everything works.

13.3 CHROME

Chrome in Windows will use the Internet Explorer settings, so configure them within Internet Explorer's **Tools -> Internet Options** dialog as explained in the previous section.

14 LIMITATIONS

14.1.1 Read-only access

The access to Denodo databases via this Denodo OData Service is read-only.

14.1.2 Unavailable functions in the \$filter system query option

Denodo OData Service does not provide support for the operator has.

Denodo OData Service does not provide support for functions:

- fractionalseconds, date, time, totaloffsetminutes, mindatetime and maxdatetime
- isof and cast
- geo.distance, geo.length and geo.intersects

Any requests containing these functions will return the error code: 501 Not Implemented.

14.1.3 Unavailable operators in the \$filter system query option

Denodo OData Service does not provide support for lambda operators: any and all.

14.1.4 Unavailable literals in the \$filter system query option

Denodo OData Service does not provide support for the literal \$it in expressions to refer to the current instance of the collection identified by the resource path.

Denodo OData Service does not provide support for the literal \$root in expressions to refer to resources of the same service.

14.1.5 Navigation properties in the \$select system query option

Denodo OData Service does not allow navigation properties as selection clauses.

14.1.6 Unavailable \$search system query option

The \$search system query option is not available in Denodo OData Service.

14.1.7 Unavailable expand option \$levels

Denodo OData Service does not provide support for the \$levels expand option that allows requesting recursive expands.

14.1.8 Unavailable Cross-Join queries

Denodo OData Service does not provide support for the resource ~/crossjoin to represent Cartesian products of entities.

14.1.9 Resolving references via the resource \$entity

Denodo OData Service does not provide support for the resource ~/\$entity that allows resolving entity references using the query option \$id.

14.1.10 Base views with white spaces in the name

Denodo OData Service cannot access entities with white spaces in the name. VDP allows white space in the base view names but white spaces are not allowed in entity names according to the OData 4 specification.

14.1.11 White spaces in the URL

Denodo OData Service does not allow white spaces between function parameters and before or after the equal sign (=) that is used to specify query options.

14.1.12 Redundant keys for dependent entities

Denodo OData Service does not allow the omission of redundant keys when there are key properties determined by the parent in a relationship. You have to add all key properties in each level.

14.1.13 Order by with \$expand system query option

Denodo OData Service does not provide support for the \$orderby query option inside \$expand system query option.

14.1.14 Order by using complex properties

Denodo Virtual DataPort does not support the order by clause using fields of registers, therefore the \$orderby query option is not available for complex properties.

14.1.15 Navigation using complex properties

When there is an association where one of the elements of an end point is a field of a register, Denodo Virtual DataPort does not allow the navigation from the end point with the complex property.

14.1.16 Referencing expanded entities

Denodo OData Service does not provide support for referencing a single entity in a "to-one" relationship when the related data is requested using the \$expand query option and the selected format for the result is JSON.

Below, there is an example of this limitation.

```
/denodo-odata.svc/movies/city?$expand=country/$ref
```

Note that this request will fail because JSON is the default format.

14.1.17 Admin user and Kerberos authentication

Denodo OData Service does not disable user access to the admin user when using Kerberos authentication.

14.2 LIMITATIONS IN VERSIONS PRIOR TO DENODO PLATFORM 6.0

14.2.1 Unavailable \$expand system query option

An \$expand expression is a comma-separated list of navigation properties that specifies the related entities that should be represented inline.

14.2.2 Counting entries of a collection when there is navigation

Navigational queries does not allow the count(*) function. When the URL contains a navigation the option of counting items in a collection (\$count) is not available.